



8.5-14 kW

Home Standby Generator Systems

When the power goes out, Champion's home standby generators automatically turn on and provide seamless, reliable power to your home. Since it is connected to your propane or natural gas system it never needs refueling. No more searching for flashlights, no extension cords, no refueling in the dark. Comfort and security...on-demand.



The SIMPLE SOLUTION™



TOTALLY AUTOMATIC 24/7
No refueling, manual operation, or extension cords needed



QUIETEST IN CLASS
Low-tone muffler design with custom sound baffling system



10 YEAR WARRANTY
Longest standard warranty on the home standby market



SUB ZERO/HIGH HEAT
24V starting system designed to operate from -22° to 104° F



EASY ACCESS
Innovative gullwing enclosure for easy installation and service

How do I CHOOSE A HOME STANDBY GENERATOR?

1 How big is your home?

This determines the size **GENERATOR** you need.



Up to **1,500 ft²** with **3-ton AC**



1,500 to - 3,000 ft² with **4-ton AC**



3,000 to - 4,000 ft² with **5-ton AC**

Standby Generator **8.5 kW** **12.5 kW** **14 kW**

2 What do you want to power?

This determines the type of **TRANSFER SWITCH** you need.



Pre-selected Circuits:

Transfer Switch **ATS50** or **ATS100**




Managed Power:

ATS200 with **DEMAND CONTROL**

How does the **WHOLE HOUSE** transfer switch with **DEMAND CONTROL** work?

Smaller generator, smarter switch. The process of buying a home standby generator shouldn't be difficult, so we spent a lot of time and energy creating The Simple Solution™. Our engineers poured over a large sampling of energy data from a broad cross-section of average American homes. They found that most homes throughout the day rarely exceed an electrical demand of about 6,000W – even during peak periods. Only during brief peak requirements that last only a few seconds (e.g. starting a central AC) does a home require more power. This is where Champion's **WHOLE HOUSE** transfer switch takes over. Your home's circuits are divided into prioritized zones – from vital to managed. Through our **DEMAND CONTROL** intelligent load management technology, your home's power requirements are monitored continuously. If your generator nears maximum capacity, pre-designated, high demand appliances are briefly managed to avoid overload. As soon as demand lowers, the generator will automatically reacquire the appliances that are managed.

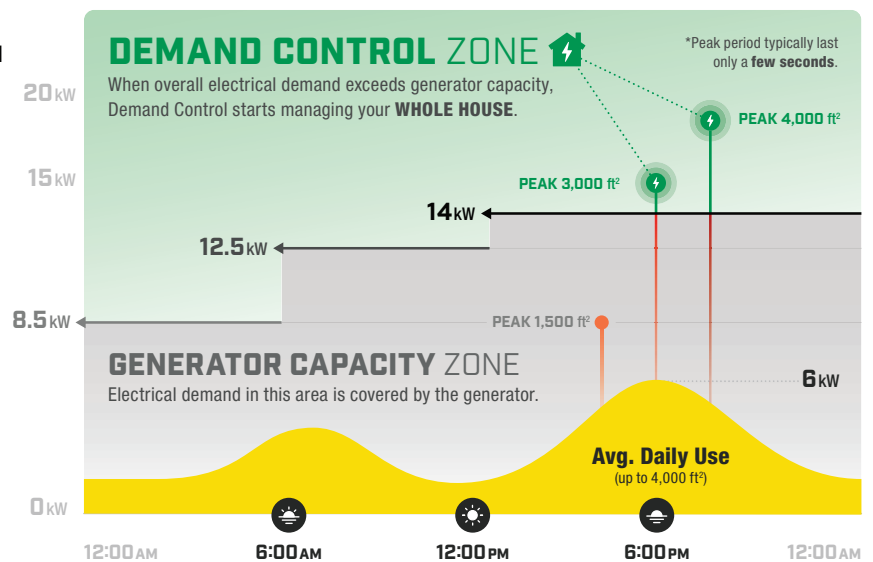



The SIMPLE SOLUTION™

HOME STANDBY GENERATOR SYSTEMS

| SPECIFICATIONS | 8.5kW | 12.5kW | 14kW |
|--|---|---------------|---------------|
| Generator only model # | 100199 | 100136 | 100237 |
| Generator + ATS50 Emergency Essentials switch (NEMA 1/NEMA 3R) model # | 100174/100177 | n/a | n/a |
| Generator + ATS100 Emergency Essentials switch (NEMA 1/NEMA 3R) model # | n/a | 100176/100179 | 100295/100292 |
| Generator + ATS200 Whole House switch w/Demand Control (service entry) model # | n/a | 100291 | 100294 |
| Voltage (single phase) | 120/240 | | |
| Amps @ 240V on LPG | 35.4 | 52 | 58.3 |
| Amps @ 240V on NG | 31.3 | 45.8 | 52.1 |
| Engine/alternator RPM | 3600 | | |
| Champion OHV engine (CC) | 439 | 717 | 754 |
| Fuel consumption @1/2 load - NG cu. ft/hr | 103.2 | 122.2 | 115.9 |
| Fuel consumption @ full load - NG cu. ft/hr | 129.3 | 198.1 | 181.5 |
| Fuel consumption @ 1/2 load - propane cu. ft/hr (gal/hr) | 0.1 (1.1) | 0.2 (1.5) | 0.2 (1.6) |
| Fuel consumption @ full load - propane cu. ft/hr (gal/hr) | 0.2 (1.6) | 0.3 (2.6) | 0.4 (2.6) |
| Governor | Mechanical | | |
| dBA at normal operation | 59.5 | 63 | 63.5 |
| Enclosure | Gullwing design/corrosion resistant steel with all-weather mounting pad | | |
| Dimensions (L x W x H) | 49 x 28 x 28 in. | | |
| Generator weight | 365 lb. | 426 lb. | 445 lb. |
| Starting system | Sub zero/high heat 24V | | |
| Warranty | 10 year limited | | |
| Oil recommendation | Mobil 1 5W-30 full synthetic | | |
| Oil capacity (qt./L) | 1.2/1.1 | 1.5/1.4 | 1.5/1.4 |

| Model | Generator | Description | Output (Propane/NG) | Engine |
|--------|-----------|--|---------------------|------------------------------|
| 100199 | 8.5 kW | Generator only | 8,500W 7,500W | 439cc Champion OHV |
| 100174 | | ATS50 Emergency Essentials switch (NEMA 1) | | |
| 100177 | | ATS50 Emergency Essentials switch (NEMA 3R) | | |
| 100136 | 12.5 kW | Generator only | 12,500W 11,000W | 717cc V-twin Champion OHV |
| 100176 | | ATS100 Emergency Essentials switch (NEMA 1) | | |
| 100179 | | ATS100 Emergency Essentials switch (NEMA 3R) | | |
| 100291 | | ATS200 Whole House switch w/Demand Control (service entry) | | |
| 100237 | 14 kW | Generator only | 14,000W 12,500W | 754cc V-twin Champion OHV |
| 100295 | | ATS100 Emergency Essentials switch (NEMA 1) | | |
| 100292 | | ATS100 Emergency Essentials switch (NEMA 3R) | | |
| 100294 | | ATS200 Whole House switch w/Demand Control (service entry) | | |



Locate a certified Champion Home Standby Dealer and Installer by visiting:
www.championpowerequipment.com or emailing hsb@cpeauto.com

Champion Power Equipment, Inc.
 12039 Smith Ave. – Santa Fe Springs, CA 90670 – USA
hsb@cpeauto.com – 1-877-338-0999